

## SOT-23 Plastic-Encapsulate Voltage Regulators


**79L18** Three-terminal positive voltage regulator

### FEATURES

Maximum Output current  $I_O$ : 0.1 A

Output voltage  $V_O$ : -18 V

Continuous total dissipation  $P_D$ : 0.35 W ( $T_a=25^\circ C$ )

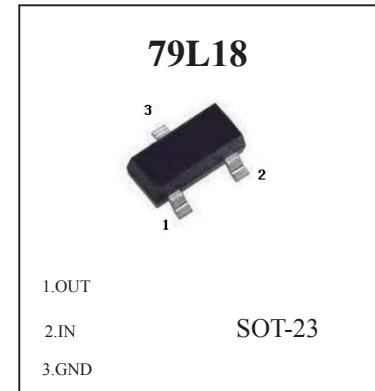

### ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies)


Parameter	Symbol	Value	Unit
Input Voltage	$V_I$	-35	V
Operating Junction Temperature Range	$T_{OPR}$	0-150	°C
Storage Temperature Range	$T_{STG}$	-65-150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ( $V_J=-26V$ ,  $I_O=40mA$ ,  $C_i=0.33\mu F$ ,  $C_o=0.1\mu F$ , unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit	
Output voltage	$V_O$		25°C	-17.3	-18.0	-18.7	V
		$-20.5V \leq V_i \leq -33V$ , $I_O=1mA \sim 40mA$	0-125°C	-17.1	-18.0	-18.9	V
		$I_O=1mA \sim 70mA$		-17.1	-18.0	-18.9	V
Load Regulation	$\Delta V_O$	$I_O=1mA \sim 100mA$	25°C		27	170	mV
		$I_O=1mA \sim 40mA$	25°C		19	85	mV
Line regulation	$\Delta V_O$	$-20.5V \leq V_i \leq -33V$	25°C		70	325	mV
		$-22V \leq V_i \leq -33V$	25°C		60	275	mV
Quiescent Current	$I_Q$		25°C			6.5	mA
Quiescent Current Change	$\Delta I_Q$	$-22V \leq V_i \leq -33V$	0-125°C			1.5	mA
	$\Delta I_Q$	$1mA \leq I_O \leq 40mA$	0-125°C			0.1	mA
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100KHz$	25°C		150		µV
Ripple Rejection	$RR$	$-21.5V \leq V_i \leq -31.5V$ , $f=120Hz$	0-125°C	33	48		dB
Dropout Voltage	$V_d$		25°C		1.7		V







\* Pulse test.

### TYPICAL APPLICATION

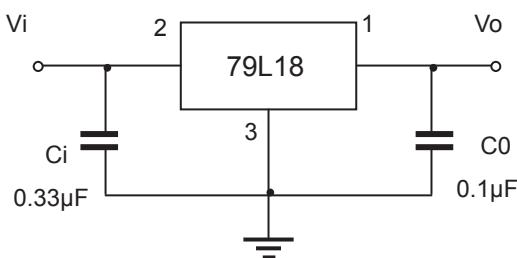

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.


## Typical Characteristics

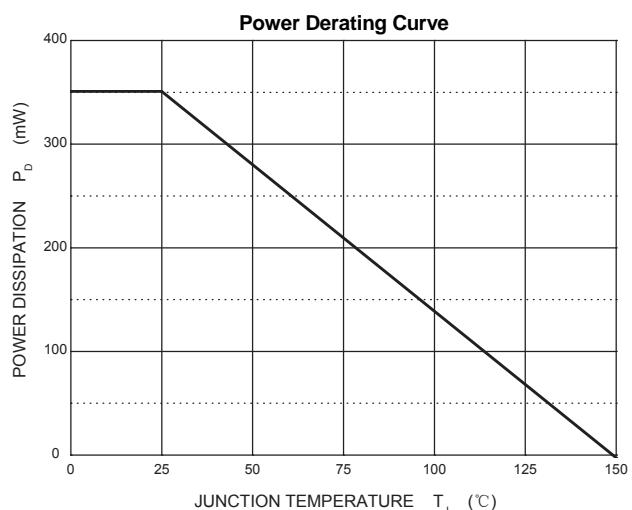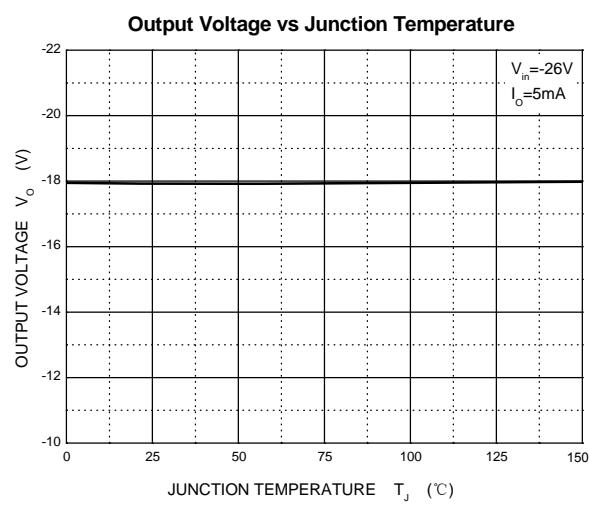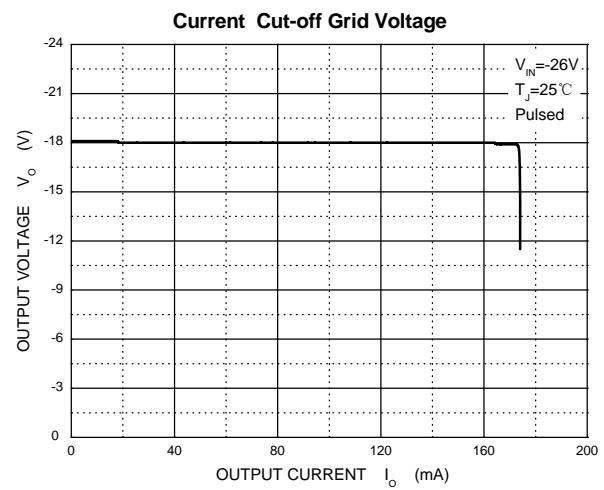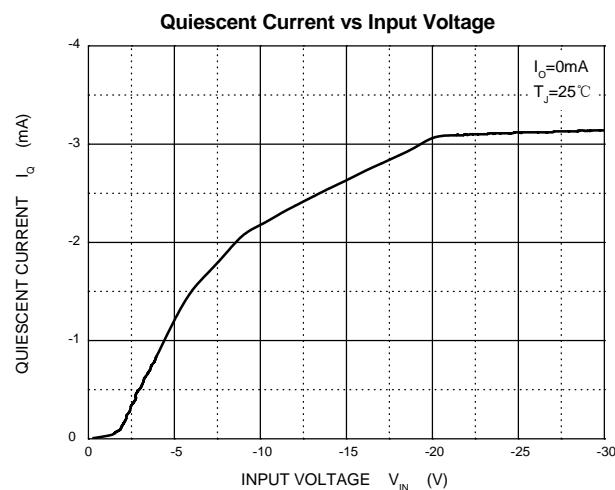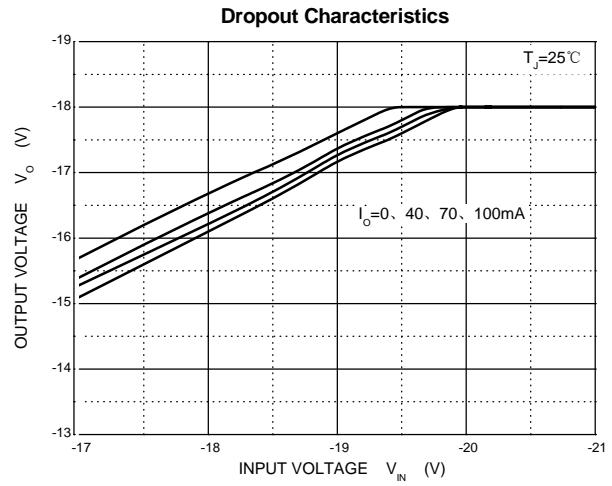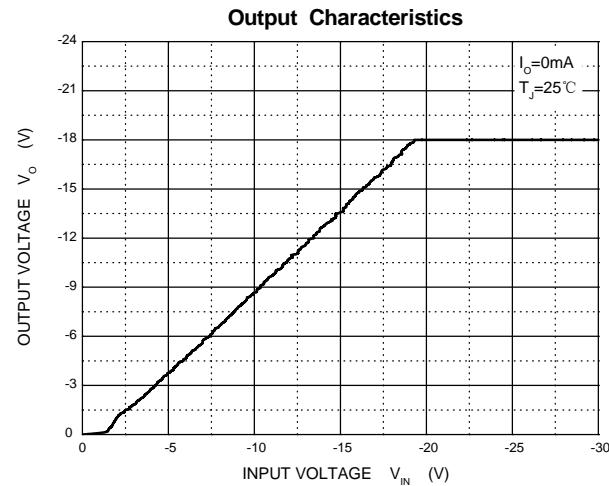

## PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

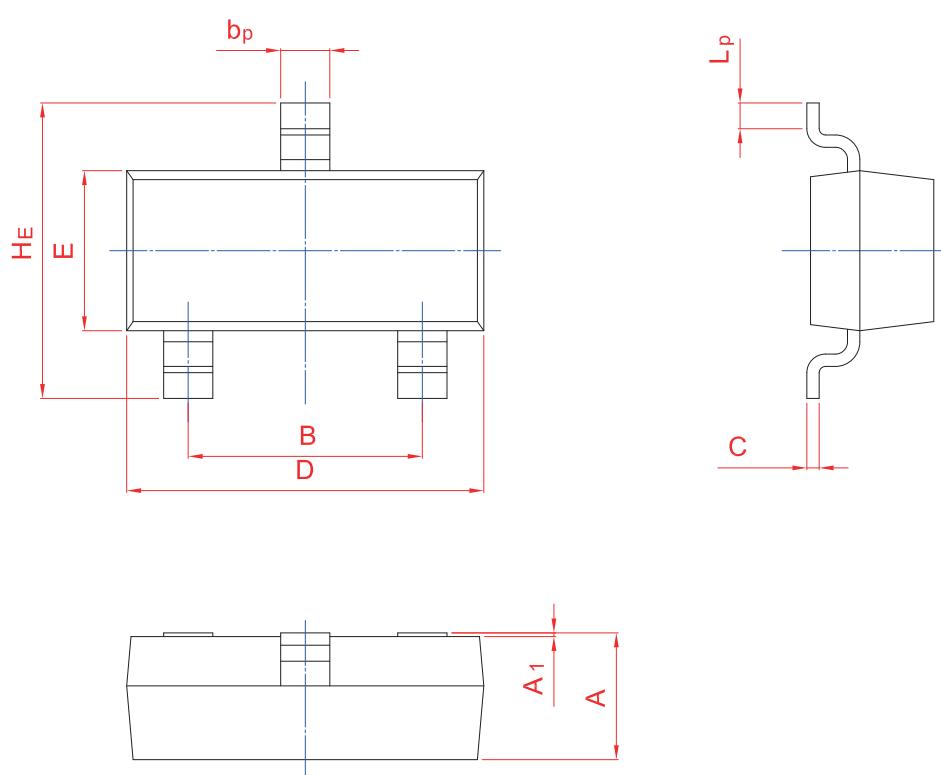

UNIT	A	B	$b_p$	C	D	E	$H_E$	$A_1$	$L_p$
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20